


Retro Softline Blind

Specifications

Colours Available	Silver, Anthracite, Mercury, White, Black, Ash, Beech, Cedar English Oak, Oregon, Rosewood and Imbuia.
Min Width (mm)	410 mm
Max Width (mm)	3000 mm
Max Drop (mm)	3400 mm
Max Area m ²	8 m ²
Operation	Combination of lift cord, cordlock and tilt wand integrated into a single unit mounted on either the left or right side of the blind.
Slats	Shall be of copper free, non corrosive aluminium alloy; width 50mm; gauge 0.24mm. Before profiling the material shall be chemically pre-treated and stove enameled to obtain maximum resistance to corrosion. The enameled slats shall withstand a 100 hour salt spray test and a 100 hour fade-o-meter test with no deterioration.
Headrail	Shall be a rolled U shape profile, top edges angled serving as re-enforcement for the profile. Before roll forming the material shall be chemically pretreated and stove enameled to obtain maximum adherence of the paint and resistance to corrosion.
Bottom Rail	Shall be made in two rolled, open profiles which shall be fitted together. The two profiles shall form a single bottomrail 43.5mm wide and 18mm high.



Designer Light Control

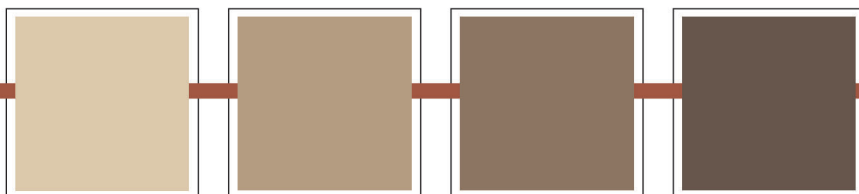

Blind Designs
& INTERIORS

